

**WECO**[®]

308 series

Compact tab distributor strips

Discover our new family extension of versatile flat plug connections.

The 308 series distributor strips extend our product portfolio of flat connector blocks. For use in industrial applications, e.g. heat exchangers, mobile homes, household appliances, power and frequency transformers as well as in products that work with high voltages/currents and are exposed to extreme temperatures.

With almost 100 years of experience in the world of connectors, WECO is the supplier for most reliable and superior components, which are characterized by highest quality and longest durability.

We are your worldwide partner for standard products and also for customer specific solutions in various applications.

DESIGN DIVERSITY

- 1- to 16-pole designs
- Tab connector widths 6.3 and 4.8 mm for tab sleeves according to DIN 46247
- Tab connector variants both with and without screw connection option
- Multiple tab arrangements and combinations
- Minimum space requirement due to top-loading connections
- Connecting in-phase ports
- Individual pole assignments customized for every customer application
- Pole marking on the housing upon request
- Different housing materials, meeting the requirements of glow wire test and household appliance standards

CERTIFICATION

- VDE- and UL-certification according to pertinent approval procedure

MARKET SIGNIFICANCE


- Proven product series in the marketplace
- Suitable for environmental temperatures up to 130°C

ADAPTABILITY.
RELIABILITY.
PERFORMANCE.




Series 308: WECO distributor strips

Power terminals in approved quality for every application.

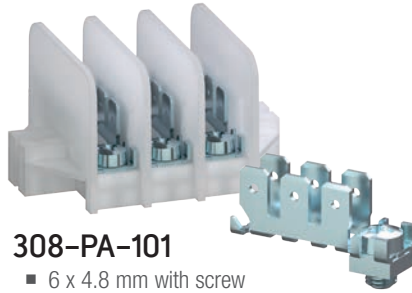

308-PA-101

- 6 x 4.8 mm with screw
- Vertical plug orientation
- 17,5 A (screw); 15 A (plug)

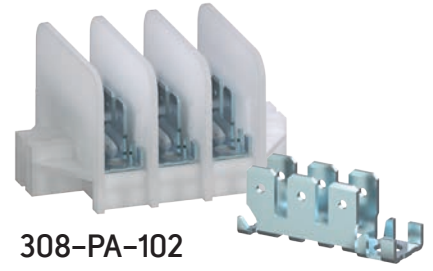


308-PA-102

- 6 x 4.8 mm
- Vertical plug orientation
- 15 A (plug connection)



308-PA-201



- 6 x 6.3 mm with screw
- Vertical plug orientation
- 17,5 A (screw); 20 A (plug)

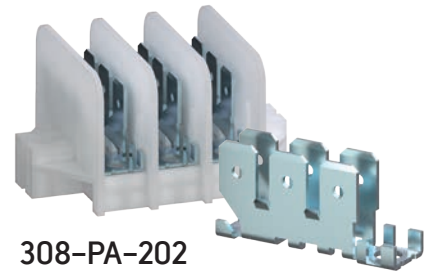

308-PA-202

- 6 x 6.3 mm
- Vertical plug orientation
- 20 A (plug connection)

Accessories: Jumper VB-308

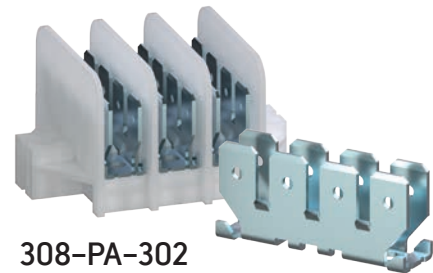

308-PA-302

- 8 x 6.3 mm
- Vertical plug orientation
- 20 A (plug connection)

WECO®

High temperature
resistant

Minimal
connection space


Easy access

Superior MTBF



308-PA-401

- 5 x 6.3 mm with screw
- Inclined plug orientation
- 17,5 A (screw); 20 A (plug)

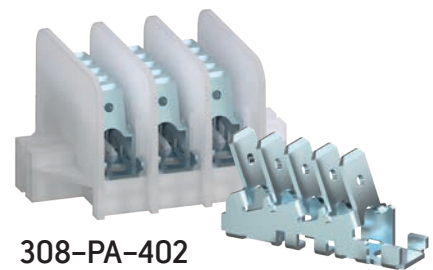

308-PA-402

- 5 x 6.3 mm
- Inclined plug orientation
- 20 A (plug connection)

All versions also available with glass fibre reinforced housing („-PAG-...“).

PA natural material temperature range up to 90°C

Glass fibre reinforced material („-PAG-...“) temperature range up to 130°C

wecoconnectors.com

WECO®

© Copyright 2020 by WECO.
All rights reserved. WECO® is a brand of the WECO Group.
Information provided in this document may be changed without prior notice.
308 series | 95 955 102 | EN.R4.05.2020